

RTI DRIVER INSTALL GUIDE


MIRAGE
AUDIO SYSTEM

Use the following procedure to create a program allowing control of Autonomic amplifiers via an RTI control system.


NOTE: Remote sources are only supported on sSeries amplifiers.

Requirement: A computer with Integration Designer and an XP series RTI processor installed.

1. Open your existing project and click on the icon for your RTI processor
2. Select the “Drivers” tab at the bottom.

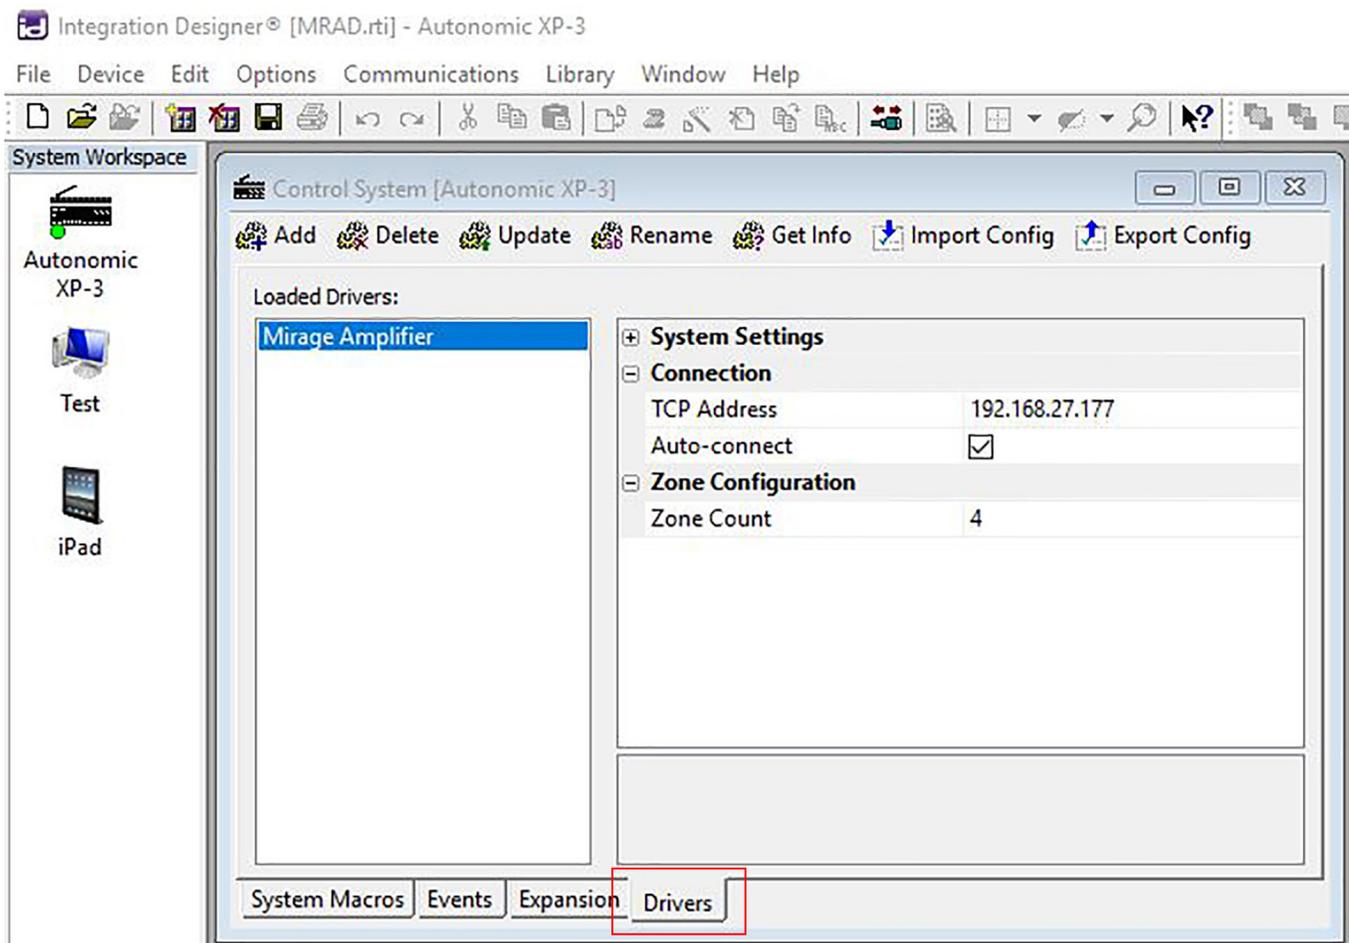


3. Click the “Add” button.

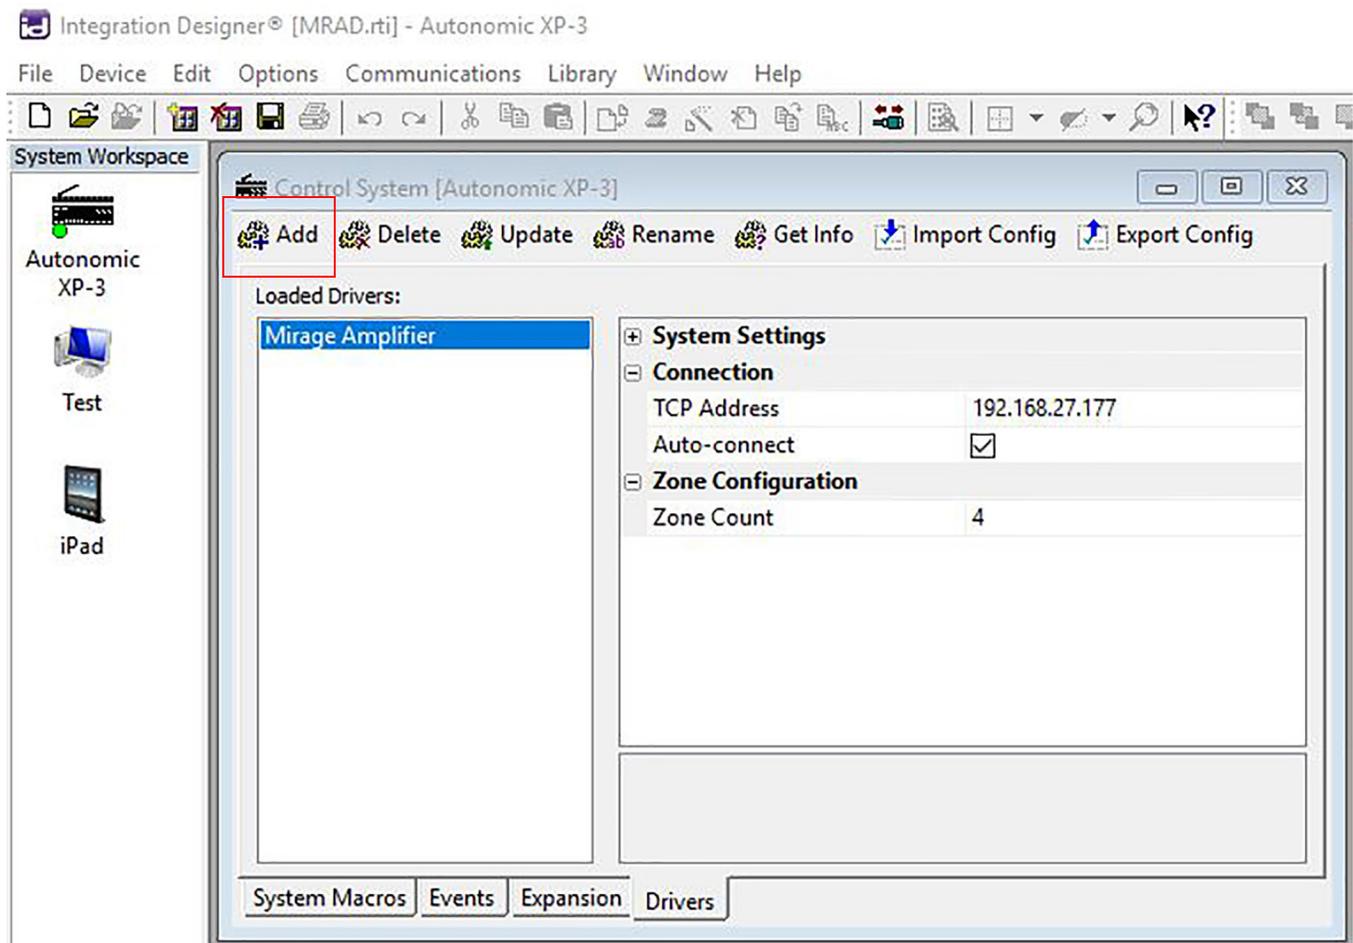


4. Browse until you find the “AutonomicAmps.rtidriver” you downloaded and select it.
5. Configure the “TCP Address” under the “Connection” settings to match the IP address of your amp.


Note: Use a DHCP reservation in the router for the MMS.

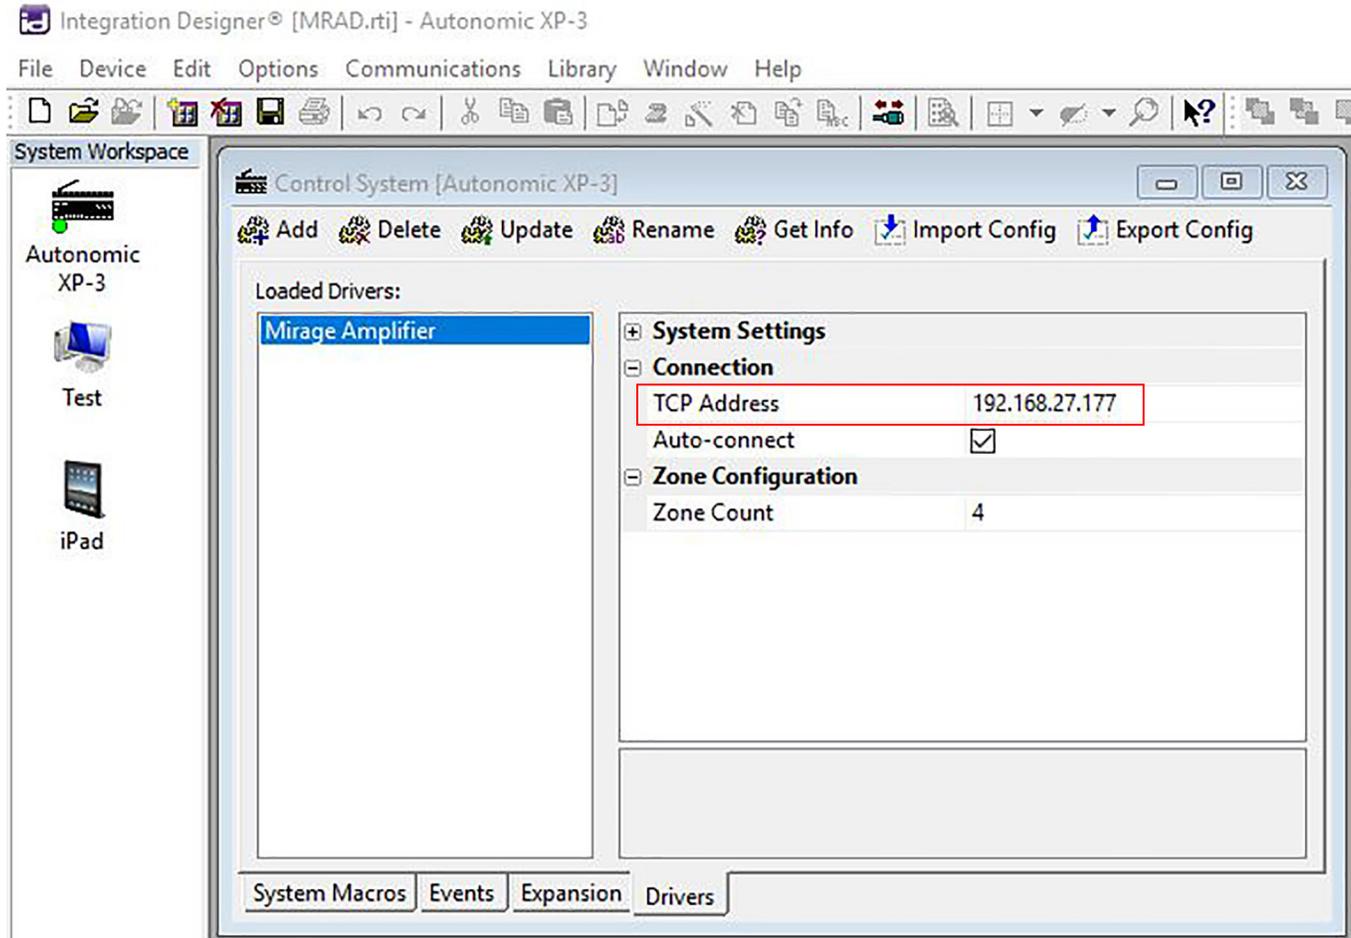

- Select the proper "Zone Count" from the drop down. You will select the total zone count, even if across multiple amplifiers since all communication goes through one single amp.

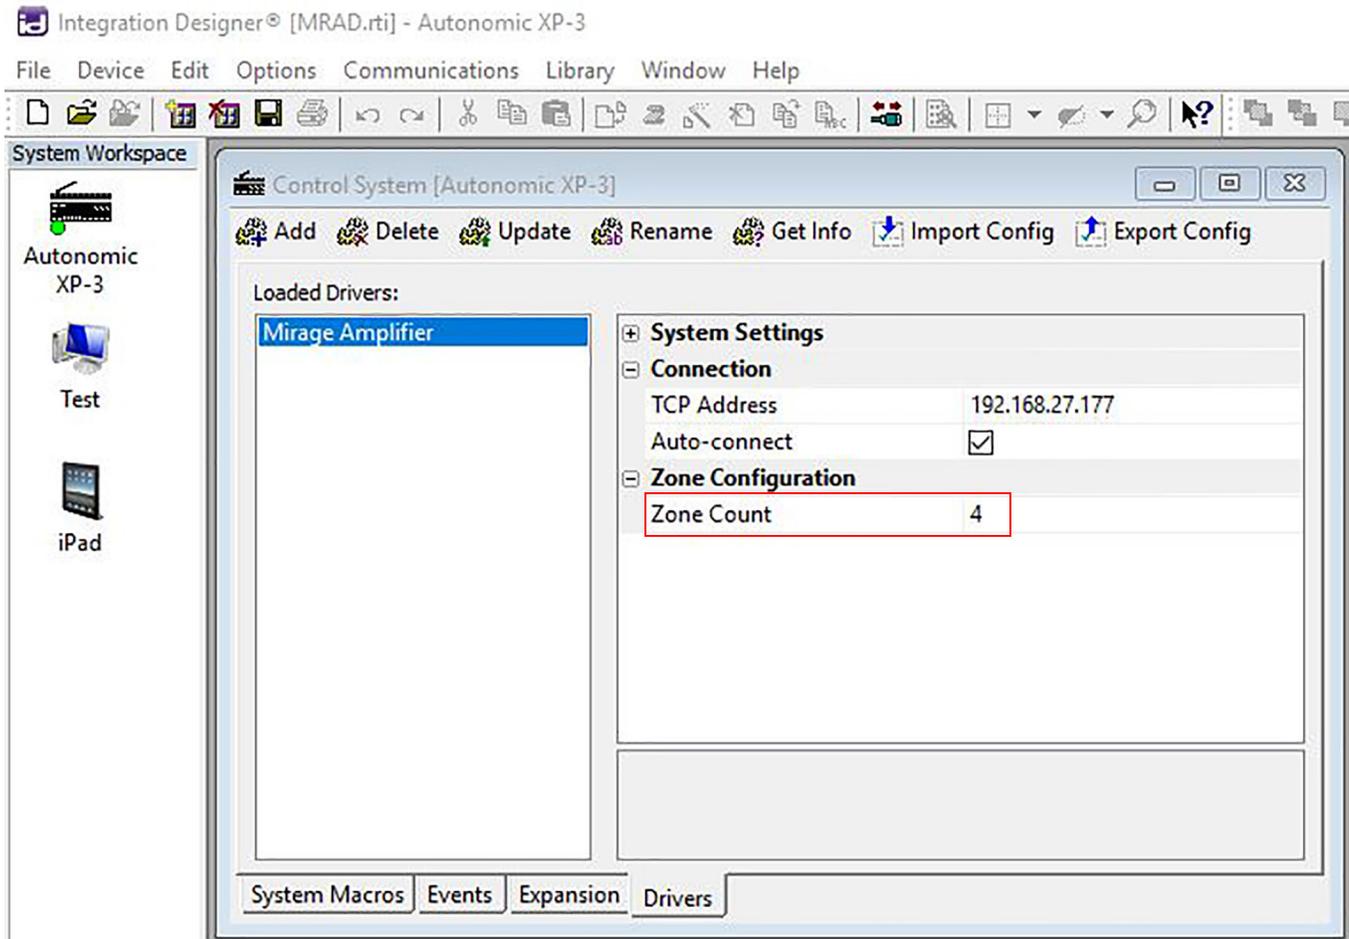

- Apply commands by clicking the “Drivers” tab under the “Library Browser” on the right side of the screen as you would for any other RTI driver.

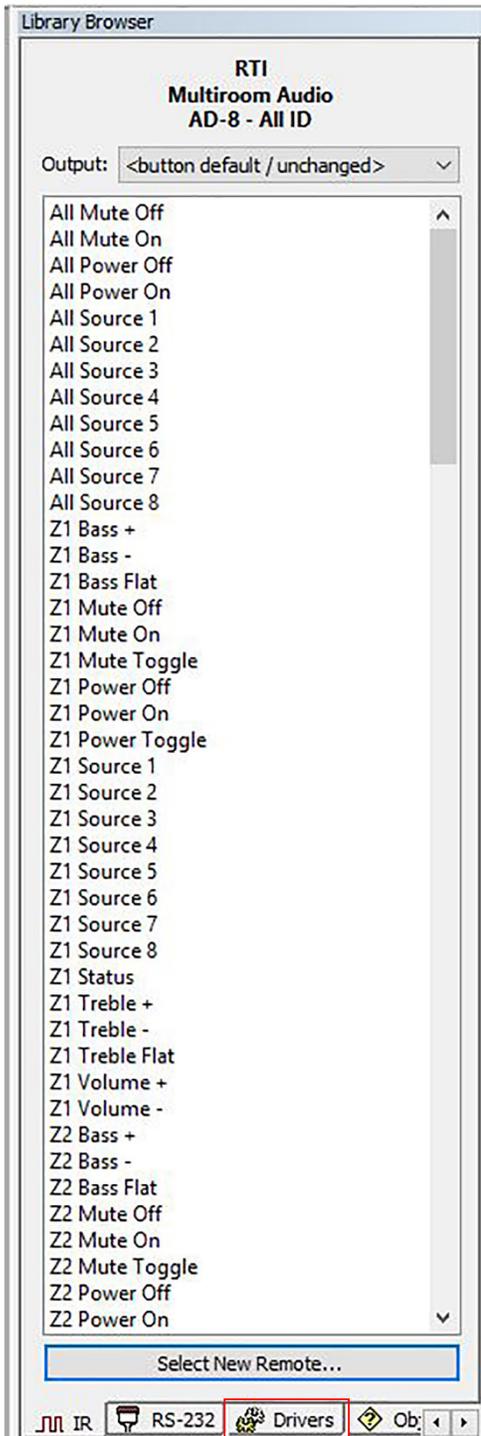

Note: A sample file “MRAD.rti” is provided for your use including a demo iPad layout for Zones and Zone Control